

Lacing Instructions

Step 1 Lay canvas across your frame and zip-tie the corners as illustrated below. Try to maintain an equal reveal for each corner. (Therefore **do not over tighten the 1st ones**.)



Do not remove these zip-ties until you are completely finished the entire lacing process.

Step 2 It is best if you start lacing from the front and work towards the back. Therefore, start by finding the center of your rope, (maybe tie a slip knot here to mark your spot), and running it through the **first grommet to the left of center, and work your way around the right** and towards the back. Then, lace other side the same way. This method saves a lot of pulling time.

NOTE: Once you have laced it on, check-fit for adjustment. Now is the time to tighten the side with the biggest reveal. Then re-tighten the other side. **Please keep in mind; a medium firm tug** is all that is needed and it will be tight as a drum head already. **FLUTTER is your worst enemy, and OVERTIGHT puts excess stress on the entire top and especially the outer edges where grommets are.**

Step 3 Once you have laced both sides all the way around to the back, **before tying off**, loop rope around the frame about 5x. This helps keep your lacing taunt until you tie the knot, and will give you necessary rope if in the future you need to re-tighten canvas or remove, etc. It's just a good idea !!

NOTE: **SUNBRELLA TAG SHOULD BE TO THE BACK AND ON THE BOTTOM (just like a shirt tag)**

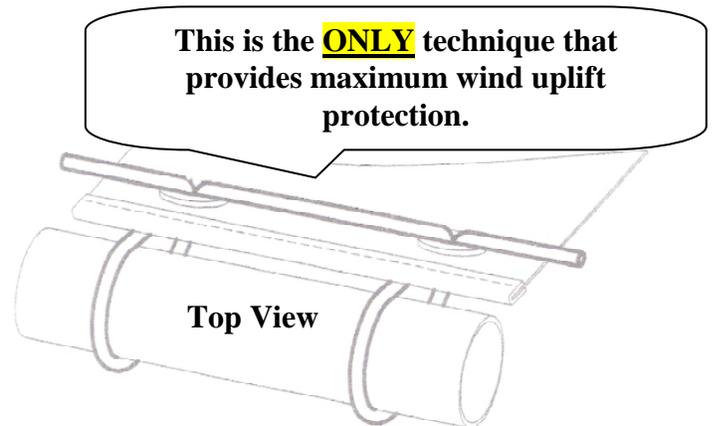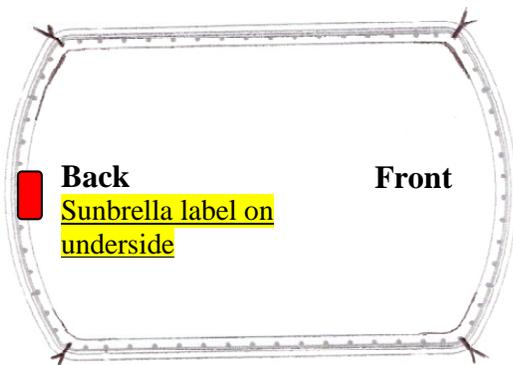

Now it is time to remove zip-ties.

Stand back and admire the good job you just did.

YOU'RE A PRO

CLEANING INSTRUCTIONS

Make sure **she** uses mild soapy water and a gentle scrub brush.



NEVER USE BLEACH

as this will weaken the threads and void all warranties. Average T-Top cover life approx. 10 years, depending on elements and area.

No need for water repellent treatment until after mid-life; approx. 8-10 years old (if even then), then, we recommend **AQUA-TITE**, but only if cover is weeping water.

HOLES for anchor light & others

Once you are completely laced, you will need to mount your lights, antenna, etc.

The best way to make your holes is to use a soldering iron, or heat up a wire or nail and push it through from the underside, thus cauterizing the canvas and placing your hole in it's exact location.

A-TEAM MARINE LLC
T-Top Covers
Specialists / Experts

We do ONE THING, ... and we do it better than anyone else
No matter where you live or who made your frame

NO WORRIES MATE
321-268-5484
www.ateammarine.com Email:Dave@ateammarine.com

Thanks for the business !!!